



SPIRO-MITE®



3/8" SPIRAL BALANCE MADE FOR NON-TILT RESIDENTIAL & COMMERCIAL WINDOWS.

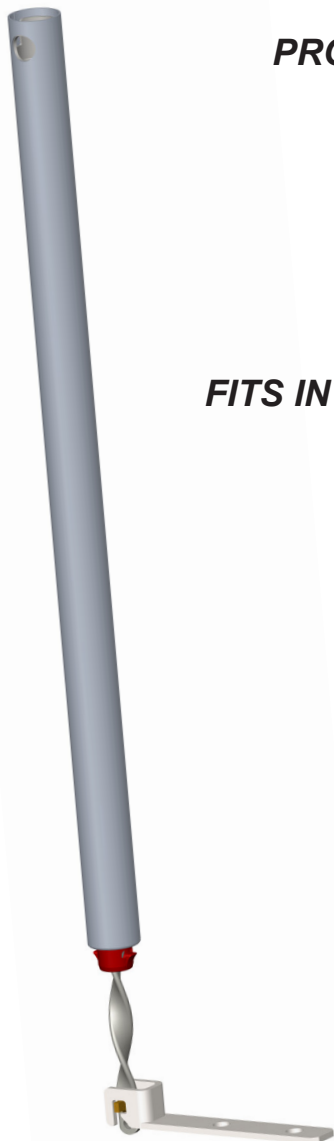

SMOOTH, UNIFORM OPERATING FORCE
*PROVIDES CONSISTENT, UNIFORM OPERATION THROUGHOUT
THE FULL TRAVEL RANGE OF THE SASH*

BROAD ADJUSTABLE WEIGHT RANGES
*REDUCE INVENTORY REQUIREMENTS
FINE TUNE WINDOW PERFORMANCE
FIELD ADJUSTABLE*

POWERFUL SPRING CAPACITY, IN A SLIM DESIGN
FITS INTO THE MOST ECONOMICAL ALUMINUM WINDOW DESIGNS

SPRINGS BY CALDWELL
DELIVERS HIGH-QUALITY, CONSISTENT PERFORMANCE.

GALVANIZED STEEL TUBES
PROVIDES STRUCTURAL STRENGTH AND DURABILITY


**WIDE RANGE OF HARDWARE OPTIONS FOR SASH
ATTACHMENT**
*EASILY ADAPTS TO MOST POPULAR NON-TILT ALUMINUM
WINDOW DESIGNS*

PRE-TENSIONED OPTIONS
*BALANCES CAN BE ORDERED WITH TURNS APPLIED
TO EXPEDITE INSTALLATION*

**WEIGHT RANGES: 4 - 42 LBS
LENGTHS: 7 - 45 INCHES
AAMA 902-07 CLASS 2
VERIFIED COMPONENT**

Solutions That Set New Standards

BALANCE TRAVEL CHARACTERISTICS

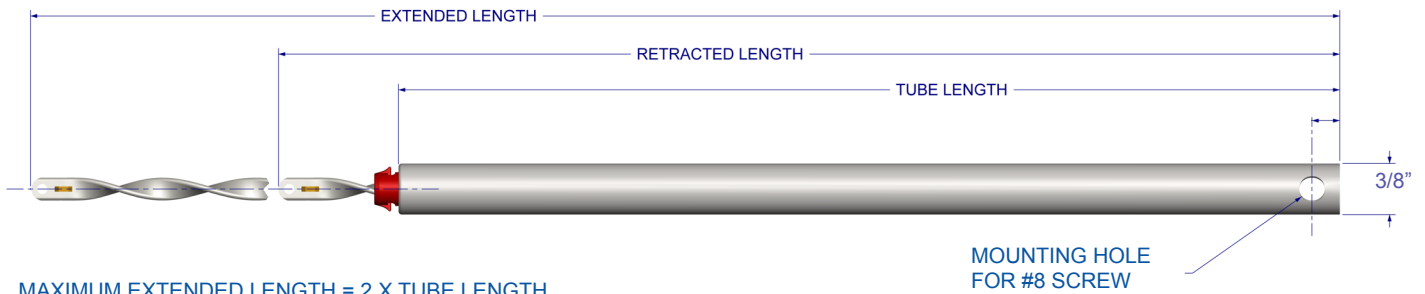

MAXIMUM EXTENDED LENGTH = 2 X TUBE LENGTH
 MINIMUM RETRACTED LENGTH = TUBE LENGTH + 1"
 MAXIMUM BALANCE TRAVEL = TUBE LENGTH - 1"

SPIROMITE® WEIGHT CAPACITY CHART

TUBE LENGTH (INCHES)	SASH WEIGHTS SUPPORTED (LBS)
7 - 9	8 - 17
10	4 - 17
11 - 12	4 - 20
13	4 - 22
14 - 16	4 - 24
17 - 19	4 - 34
20 - 32	5 - 34
33 - 40	7 - 34
41 - 45	27 - 34

HOW TO ORDER:

1. Determine your sash weight and tube length needed
2. Consult with Caldwell customer service for tensioning charts and further ordering instructions.